

# Circuit Ready

## Technology connectivity certification

The product

### EagleEye Director II

developed by Poly has been certified  
for Interoperability with **Circuit Meeting Room**  
based on functional testing performed by Unify

Circuit Meeting Room OS V1R7.0.4 / Product FW 2.2.0.39

Supported features: Video camera

The test was conducted conforming to DIN EN ISO 9001. This certificate is only valid in conjunction with the full test report and the notes contained therein. The tests covered functional test and subjective acoustic test. **Please consider that the test report only covers the functionality of the interface.**

Munich, 03 June 2020



# Functional Test Report

## Circuit Meeting Room

With

## Poly EagleEye Director II

Author:	Ulrich Aust
Version:	1.0
Status:	Released
Date:	03.06.2020

## Table of Contents

1. Overview	3
1.1. Executive Summary	3
1.1.1. Basic Equipment	3
1.2. Test Strategy	3
1.3. Test Result Summary	3
1.3.1. Problems	3
1.3.2. Restrictions	3
1.3.3. Remarks	3
1.3.4. Setup	4
1.4. Test cases	5
1.5. Remarks / Appendixes	5

## ***History of Change***

Version	Date	Description	Name
1.0	03.06.2020	Released	Ulrich Aust
0.1	07.05.2020	Draft	Ulrich Aust

# 1. Overview

## 1.1. Executive Summary

The functional tests were carried out at GVS (Global Vendor Support) test lab. The test cases are listed below. The test reports are automatically generated report.

### 1.1.1. Basic Equipment

<b>Test environment</b>	
<b>Circuit Meeting Room OS</b>	V1R7.0.4
<b>Circuit Meeting Room Application</b>	1.2.7602
<b>Poly EagleEye Director II FW</b>	2.2.0.39

## 1.2. Test Strategy

The certification test performed for Poly EagleEye Director II is focused on audio basic functionality for

video

audio

audio / video

The focus is on basic functionality and does not cover any quality measurements for audio or video streams. If additional features in the product are relevant for proper operation with Circuit Meeting Room then these are listed in the test cases.

## 1.3. Test Result Summary

For details please have a look at the test results

### 1.3.1. Problems

- No problems


### 1.3.2. Restrictions

- No restrictions

### 1.3.3. Remarks

- For best results it is recommended using the far end echo cancellation feature available on Poly EagleEye Director II. On Circuit Meeting Room, this requires activations of the line out connector (see section 5.11.2 *How to Enable/ Disable Audio Line-Out* in the Circuit Meeting Room Administration manual).

### 1.3.4. Setup

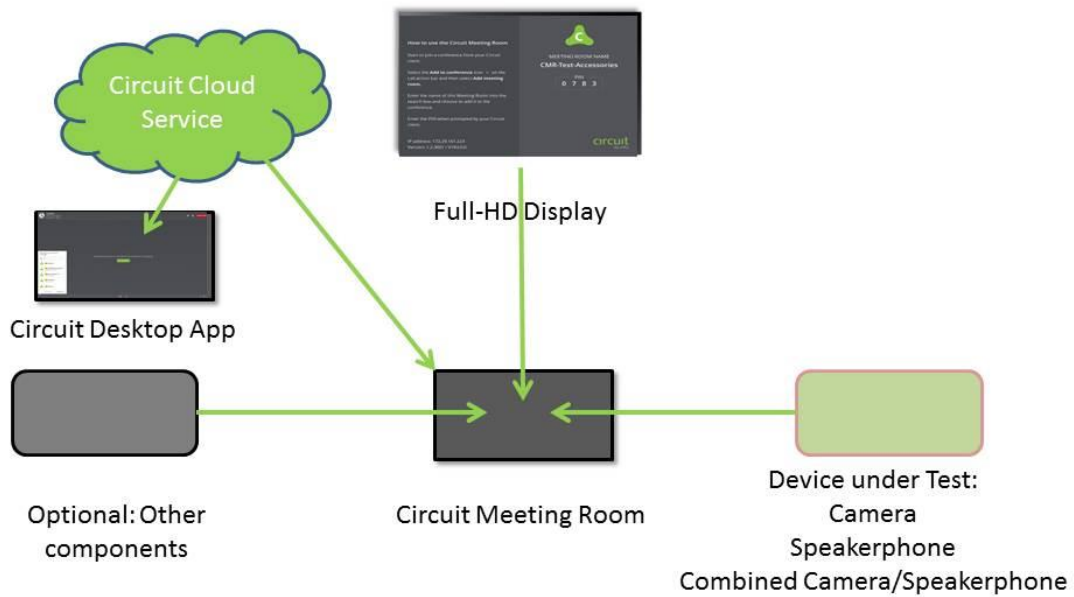

**Figure 1: Logical Topology Diagram Circuit Meeting Room**

Circuit Meeting Room is tested in standard configuration: Network connected via Gigabit Ethernet, output display on Full-HD capable display (single screen configuration), for speakerphones a standard web cam is connected (and vice versa) to complete the configuration. Circuit cloud service is used for operation.

# Test Results in Detail

## 1.4. Test cases

Key	Test Description	Result	Comment
<a href="#">DTHSFT-5395</a>	Connection via USB	Passed	
<a href="#">DTHSFT-5396</a>	Conference: Audio output	Invalid	
<a href="#">DTHSFT-5397</a>	Conference: Audio input	Invalid	
<a href="#">DTHSFT-5398</a>	Conference: Video input	Passed	
<a href="#">DTHSFT-5399</a>	Conference: Audio mute (local)	Invalid	
<a href="#">DTHSFT-5400</a>	Conference: Mute sync with Circuit	Invalid	
<a href="#">DTHSFT-5401</a>	Conference: Release from conference (sync with Circuit)	Invalid	
<a href="#">DTHSFT-5402</a>	Connection and features via BT	Invalid	
<a href="#">DTHSFT-5403</a>	Power saving	Passed	
<a href="#">DTHSFT-5404</a>	Telephony - interaction	Invalid	
<a href="#">DTHSFT-5405</a>	Conference: Long duration call	Passed	
<a href="#">DTHSFT-5406</a>	Conference: Manual testing - mixed scenarios	Passed	

## 1.5. Remarks / Appendixes

Explanation of acronyms:

CMR	Circuit Meeting Room
DUT	Device Under Test
INVALID	Test NOT applicable as not supported by DUT
FAILED	Test case NOT successful
PASSED	Test case successful

# Functional Test Report

## Circuit Meeting Room

With

## Poly EagleEye Director II

Author:	Ulrich Aust
Version:	1.0
Status:	Released
Date:	03.06.2020

## Table of Contents

1. Overview	3
1.1. Executive Summary	3
1.1.1. Basic Equipment	3
1.2. Test Strategy	3
1.3. Test Result Summary	3
1.3.1. Problems	3
1.3.2. Restrictions	3
1.3.3. Remarks	3
1.3.4. Setup	4
1.4. Test cases	5
1.5. Remarks / Appendixes	5

## ***History of Change***

Version	Date	Description	Name
1.0	03.06.2020	Released	Ulrich Aust
0.1	07.05.2020	Draft	Ulrich Aust



# 1. Overview

## 1.1. Executive Summary

The functional tests were carried out at GVS (Global Vendor Support) test lab. The test cases are listed below. The test reports are automatically generated report.

### 1.1.1. Basic Equipment

<b>Test environment</b>	
<b>Circuit Meeting Room OS</b>	V1R7.0.4
<b>Circuit Meeting Room Application</b>	1.2.7602
<b>Poly EagleEye Director II FW</b>	2.2.0.39

## 1.2. Test Strategy

The certification test performed for Poly EagleEye Director II is focused on audio basic functionality for

video

audio

audio / video

The focus is on basic functionality and does not cover any quality measurements for audio or video streams. If additional features in the product are relevant for proper operation with Circuit Meeting Room then these are listed in the test cases.

## 1.3. Test Result Summary

For details please have a look at the test results

### 1.3.1. Problems

- No problems


### 1.3.2. Restrictions

- No restrictions

### 1.3.3. Remarks

- For best results it is recommended using the far end echo cancellation feature available on Poly EagleEye Director II. On Circuit Meeting Room, this requires activations of the line out connector (see section 5.11.2 *How to Enable/ Disable Audio Line-Out* in the Circuit Meeting Room Administration manual).

### 1.3.4. Setup

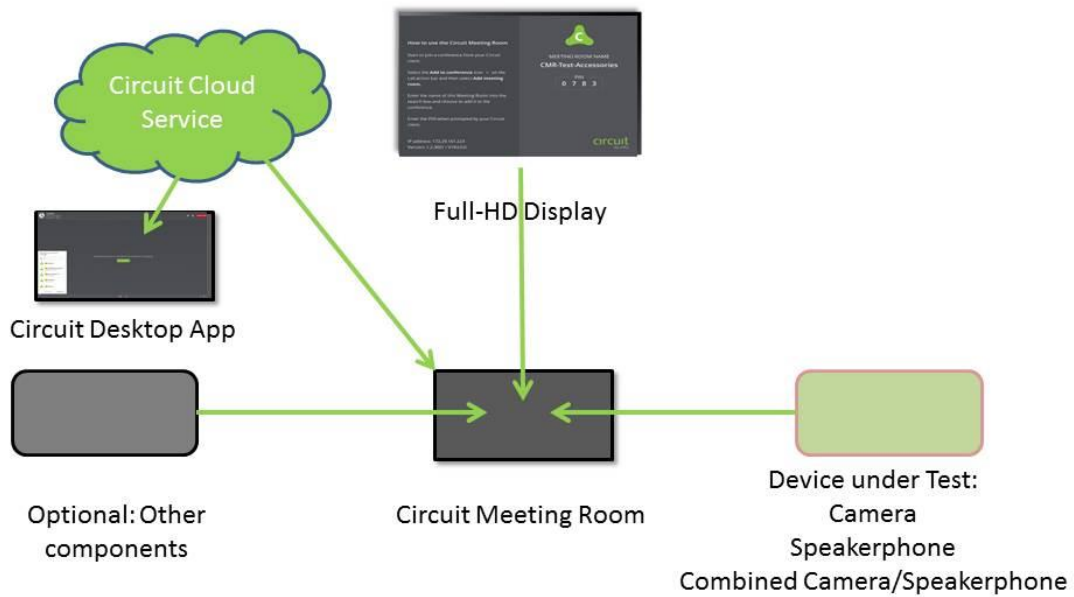

**Figure 1: Logical Topology Diagram Circuit Meeting Room**

Circuit Meeting Room is tested in standard configuration: Network connected via Gigabit Ethernet, output display on Full-HD capable display (single screen configuration), for speakerphones a standard web cam is connected (and vice versa) to complete the configuration. Circuit cloud service is used for operation.

# Test Results in Detail

## 1.4. Test cases

Key	Test Description	Result	Comment
<a href="#">DTHSFT-5395</a>	Connection via USB	Passed	
<a href="#">DTHSFT-5396</a>	Conference: Audio output	Invalid	
<a href="#">DTHSFT-5397</a>	Conference: Audio input	Invalid	
<a href="#">DTHSFT-5398</a>	Conference: Video input	Passed	
<a href="#">DTHSFT-5399</a>	Conference: Audio mute (local)	Invalid	
<a href="#">DTHSFT-5400</a>	Conference: Mute sync with Circuit	Invalid	
<a href="#">DTHSFT-5401</a>	Conference: Release from conference (sync with Circuit)	Invalid	
<a href="#">DTHSFT-5402</a>	Connection and features via BT	Invalid	
<a href="#">DTHSFT-5403</a>	Power saving	Passed	
<a href="#">DTHSFT-5404</a>	Telephony - interaction	Invalid	
<a href="#">DTHSFT-5405</a>	Conference: Long duration call	Passed	
<a href="#">DTHSFT-5406</a>	Conference: Manual testing - mixed scenarios	Passed	

## 1.5. Remarks / Appendixes

Explanation of acronyms:

CMR	Circuit Meeting Room
DUT	Device Under Test
INVALID	Test NOT applicable as not supported by DUT
FAILED	Test case NOT successful
PASSED	Test case successful